

4K 1 SENSOR EYEVIEW PANORAMIC BULLET

HD IP IR BULLET CAMERA
8MP / BIDIRECTIONAL AUDIO
DC12V / PoE / IP67 RATED





Minimize IR Reflection with Black-Window

Using a Black-window cover, IR Reflection is significantly reduced in Night mode images than normal dome cover reflection especially at night compared to the conventional transparent dome cover.





4K 180° Panoramic Eyeview

The images output from the 4K sensor supports panoramic views with minimum distortion similar to human vision compared to Fisheye's de-warping images.

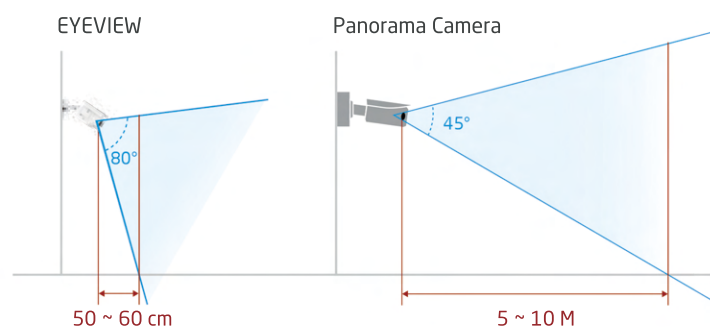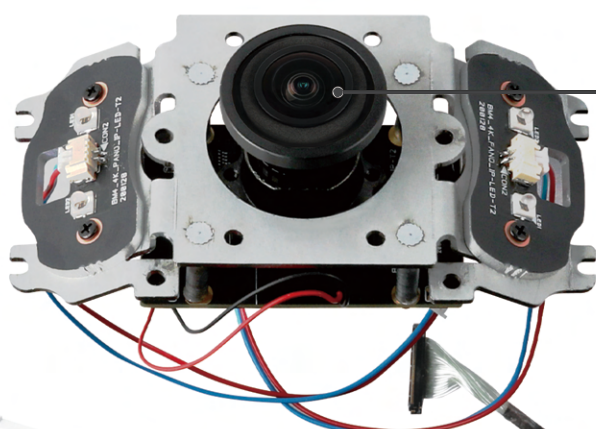

Suitable for Indoors Installation

Focal Length of at least 50 to 60CM.
Compared to panoramic cameras with a focal length of at least 5 to 10M, it's much easier to install in narrow corridors or buses with the near 50 to 60CM. Also, the compact size doesn't affect interior design when installed indoors, mounts by fitting is easy to install.

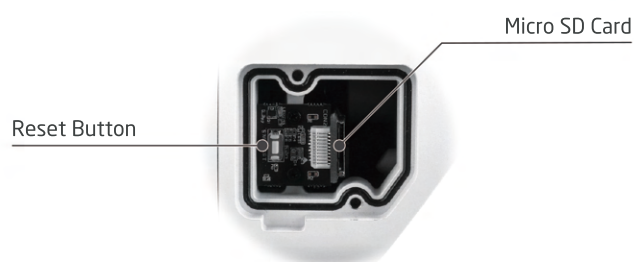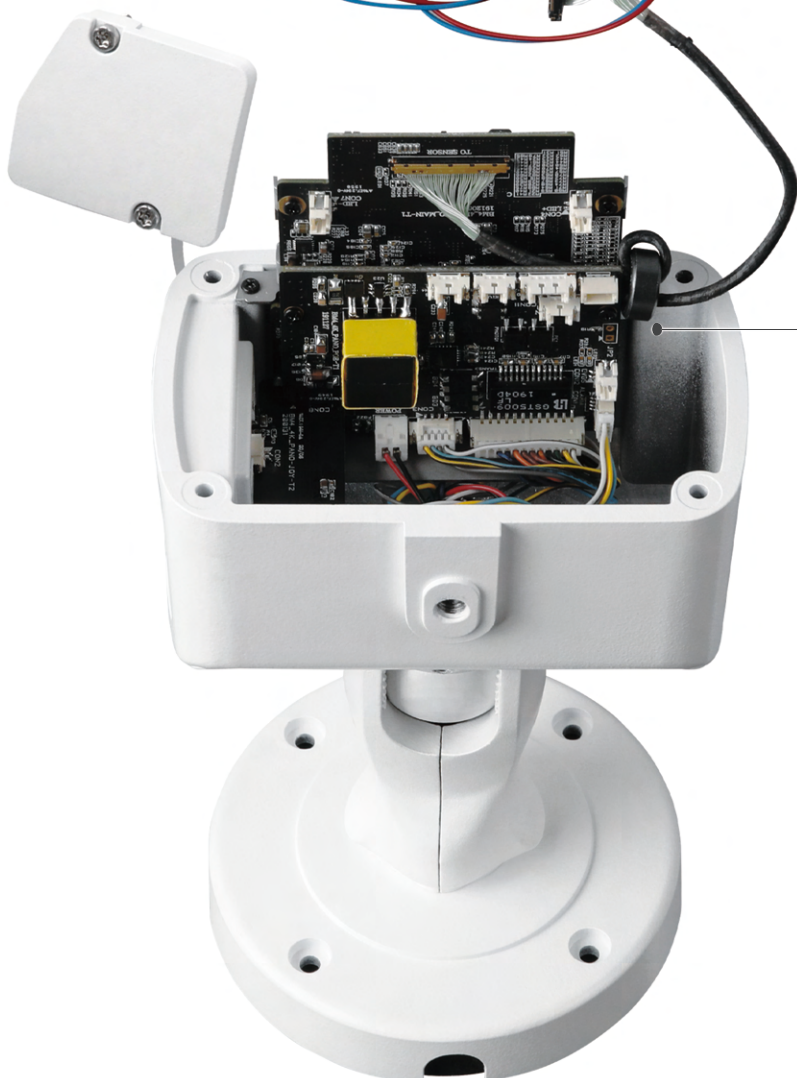

External Control

You can control / access the Reset / 2ndVideo Output / Micro SD Card from the outside.

4K 1 SENSOR EYEVIEW PANORAMIC BULLET

HD IP IR BULLET CAMERA
8MP / BIDIRECTIONAL AUDIO
DC12V / PoE / IP67 RATED





블랙 윈도우 커버로 IR 난반사 최소화

블랙 윈도우 커버를 사용하여 일반 투명 돔 커버를 사용했을 때 보다 야간 영상에서 IR 난반사를 현저하게 줄였습니다.





4K 1센서 180° 아이뷰

1개의 4K 센서에서 출력된 영상을 자동 디와핑해 보여줌으로써 피시아이 영상과 비교했을 때 사람의 시야와 흡사한 왜곡이 최소화된 파노라믹뷰를 지원합니다.

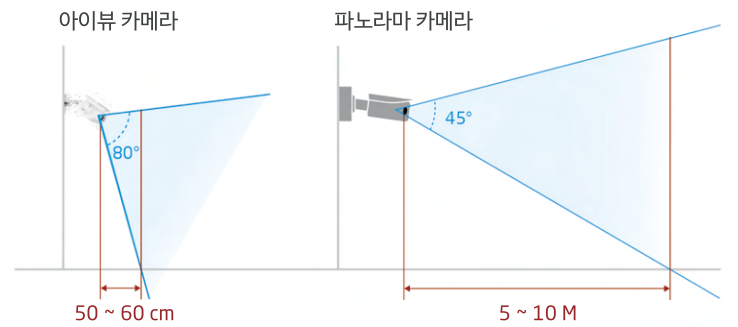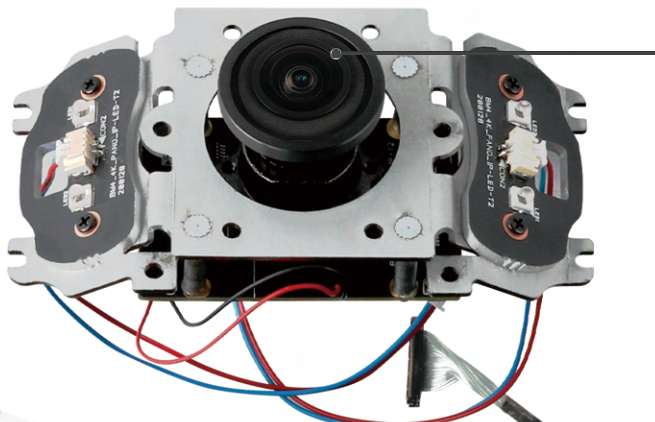

초점 거리 최소 50~60cm 로 실내 설치 적합

초점 거리가 최소 5 ~ 10 M 인 파노라마 카메라보다 월등히 가까운 50 ~ 60 cm로 좁은 복도나 버스 안에 설치가 가능합니다. 또한 작은 사이즈로 실내에 설치했을 때 인테리어에 지장을 주지 않으며, 마운트에 끼우는 방식으로 설치가 간편합니다.

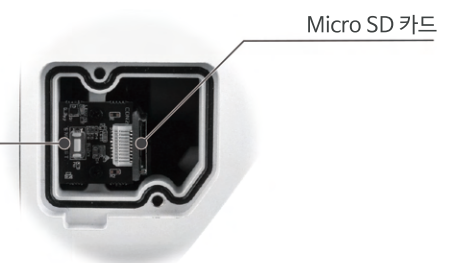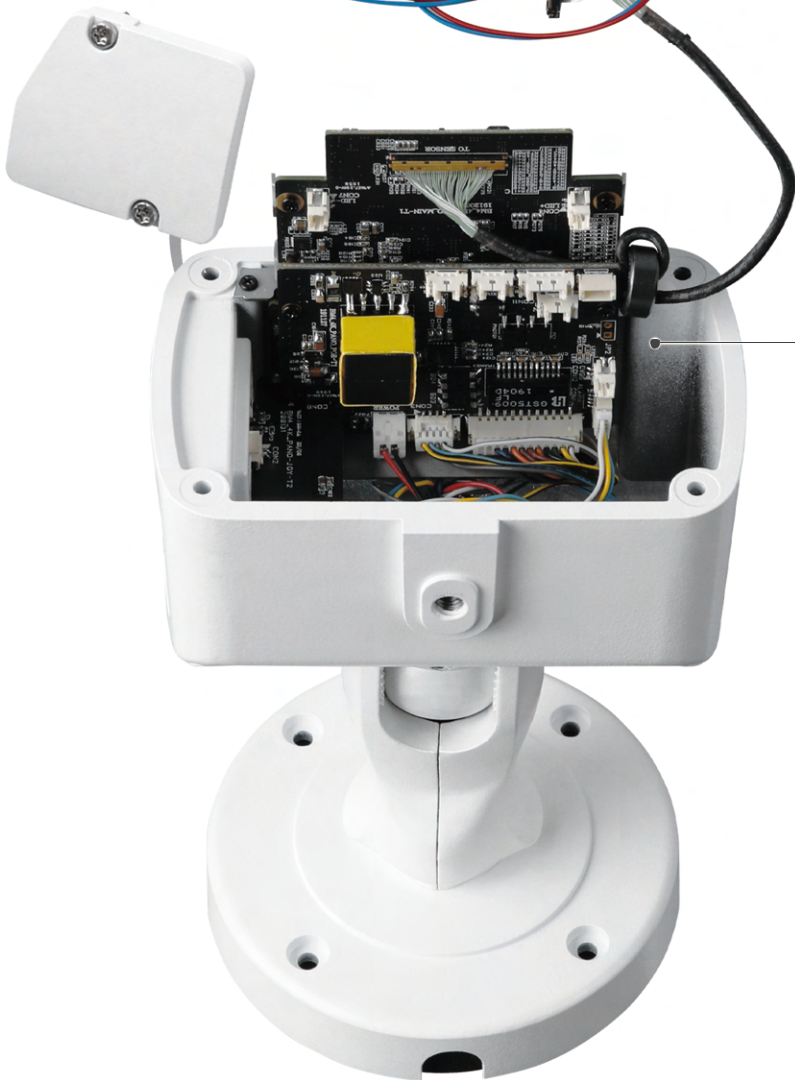

외부 제어

카메라 외부에서 Reset / 2nd Video Output / Micro SD Card를 쉽게 제어할 수 있습니다.